




FLANGE SKILLETS INTERNATIONAL, LLC
8687 W. Irlo Bronson Memorial Hwy
Suite 200
Kissimmee, FL 34747
Phone: (337) 322-2271
Email: sales@flangeskillets.com

HALF SKILLET UNPACKING / RIGGING INSTRUCTIONS

Note: Care must be used at all times to protect the sealing surfaces of the gasket. Flange Skillets International, LLC assumes no liability for any damages which may result from the use of our product. User assumes all risks.


Step 1 Remove the shipping tie

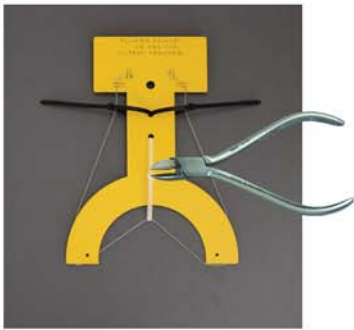

Step 2 Place the skillet on the gasket (centered)




Step 3 Install the retaining wire around gasket (centered)

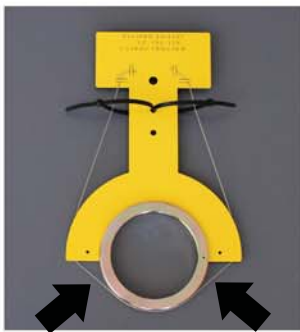

Step 4 Pull the "tensioning" ties to tighten the retaining wire



Step 5 Install the "safety" tie

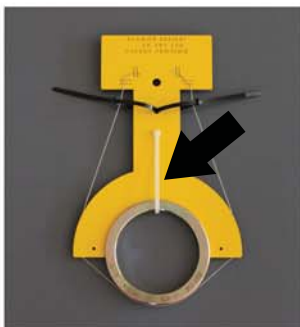



FLANGE SKILLET'S INTERNATIONAL, LLC
8687 W. Irlo Bronson Memorial Hwy
Suite 200
Kissimmee, FL 34747
Phone: (337) 322-2271
Email: sales@flangeskillets.com

HALF SKILLET USING THE SKILLET

Note: The Half Skillet is designed to be removable. Flange Skillets International, LLC assumes no liability for any damages which may result from the use of our product. User assumes all risks.

Step 1 Install the flange studs and nuts on the lower half of the flange.

Step 2 Remove the "safety" tie. Inventory.

Step 3 Push the supplied threaded rod through the depth gauge hole. (Figure 1)

Step 4 Lower the Flange Skillet™ / gasket assembly until the depth gauge rod rests on the top of the flange.

Step 5 Draw the flanges together to secure the edges of the gasket within the ring groove.

Step 6 Inspect to confirm that the gasket is properly seated in the ring groove.

Step 7 Cut one side of the exposed retaining wire. (Figure 2)
Pull the wire clear of the assembly.

Step 8 Remove the Flange Skillet™ from the flange. Continue with the installation of the remaining studs and nuts.

Figure 1

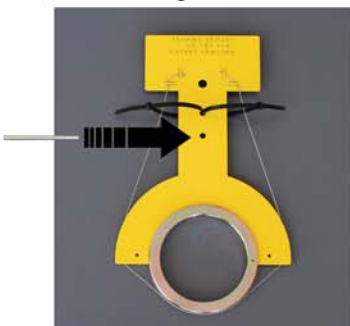


Figure 2

